

International Journal of Future Computer and Communication

CONTENTS

Volume 1, Number 2, August 2012

- Integrated Load-Based Power Saving for BS and MSS in the IEEE 802.16e Network.....83
Chun-Chuan Yang, Yi-Ting Mai, Jeng-Yueng Chen, and Yu-Chen Kuo
- False Positives and Negatives from Real Traffic with Intrusion Detection/Prevention Systems.....87
Cheng-Yuan Ho, Ying-Dar Lin, Yuan-Cheng Lai, I-Wei Chen, Fu-Yu Wang and Wei-Hsuan Tai
- Information Extraction of Review Using LIWC.....91
Ji Yeon Lim, Jae Yoel Yoon, Lee Joon Kim and Ung Mo Kim
- Automatic Singer Identification Based on Speech-Derived Models.....94
Wei-Ho Tsai and Hsin-Chieh Lee
- Performance Analysis of Elliptic Curve Cryptography Using Onion Routing to Enhance the Privacy and Anonymity in Grid Computing.....97
H. Parveen Begam and Maluk Mohamed M. A.
- Encircled Hyper-Redundant Manipulation using Virtual Constraint, Bezier Curve and Gradient Descent Method.....101
Chatklaw Jareanpon
- Automatic Generation of Systematic Test Cases Using AADL for Embedded Software.....106
Chunyan Ma, Yue Li, Yunwei Dong, and Yaqi Liu
- Analysis of Students' Grades in Mathematics, English, and Programming Courses: A KDD Approach.....111
M. A. Anwar, Naseer Ahmed, and Wajahatullah Khan
- NoC Multi-Objects Mapping Based On Enhanced Chaos Discrete Artificial Bee Colony Algorithm.....116
Lili Pan, Zhe Li, and Xiang Ling
- Vulnerability Evaluation Method Considering Power Supply Environment for Power Analysis Attacks.....121
Masaya Yoshikawa and Toshiya Asai
- Pixel-wise based Digital Watermarking using a Multiple Sections Embedding Technique.....124
Komwit Surachat
- Power Efficient Cooperative Relay Systems for Multiuser MIMO.....128
Soobum Cho, Sang Kyu Park, and Dong Geol Ryu
- Long Term Evolution Downlink Physical Layer Simulation in Matlab and Simulink.....131
Karthik Ravindhra, Siva Subramanian Manohar, and Uma Sankar Govindaswamy
- PORS: A Peer-to-Peer Movie Recommendation System.....135
Chian Wang and Dai-Yang Lin

Mining Associative Classification without Candidate Rules.....	138
<i>Panida Songram</i>	
Historical Information Retrieval Model based on Period Query Using Time-Variant Extraction of Historical Object.....	142
<i>Jun Lee, Yong-Hee Jang, and Yong-Jin Kwon</i>	
Misuse for Security Hardening Assessment in Application Software Deployment.....	147
<i>Kwanchanok Limbandit and Yunyong Teng-amnuay</i>	
Provably Secure Threshold Proxy Signature Scheme Based on Factoring.....	151
<i>Bing-Chang Chen</i>	
A Preliminary Study of Merchants' Intention to Adopt Online Payment Gateway in Indonesia.....	155
<i>Nathalia Devina Widjaja and Ardy Tedjawidjaja</i>	
Ambient Browser: Mobile Mixed Reality System Based on Ambient Intelligence.....	160
<i>Dea-Gyun Kim, Yong-Hee Jang, and Yong-Jin Kwon</i>	
Online Decision Support System of Used Car Selection Using K-Nearest Neighbor Technique.....	164
<i>Sasitorn Kaewman, Wallapa Khemsanthia, Oratai Boongomud, and Chatklaw Jareanpon</i>	
Online Computation of Mutual Information and Word Context Entropy.....	167
<i>Wei-Hsuan Lin, Yi-Lun Wu, and Liang-Chih Yu</i>	
EEG Signals Classification Using a Hybrid Structure of ANN and PSO.....	170
<i>Sema Arslan, Gulay Tezel, and Hakan Isik</i>	
TENS Modelling Via ANFIS.....	173
<i>Esra Satir and Hakan Isik</i>	
Intrusion Prevention System in VPN with Entities Based Access Rule and Vibrant Key Authentication.	176
<i>G. Kanimozhi, S. Ravimaran, and M. A. Maluk Mohamed</i>	
Sensor Grid Middleware for Health Care Monitoring.....	180
<i>T. Vigneswari and M. A. Maluk Mohammed</i>	
Cover Time Analysis of Ad-Hoc Wireless Network.....	184
<i>Bhupendra Gupta</i>	
Data Management in the Mobile Cloud Using Surrogate Object.....	187
<i>Ravimaran Shanmugam and Maluk Mohamed M. A.</i>	
XMI2UC: An Automatic Tool to Extract Use Cases from Object Oriented Source Code.....	193
<i>Shouki A. Ebad and Moataz A. Ahmed</i>	
Robust Chaos via Smooth Exponential Map.....	196
<i>Fadi Abu-Amara and Ahmed Musa</i>	
A Modified Cuckoo Optimization Algorithm for Engineering Optimization.....	199
<i>Humar Kahramanli</i>	
Web Access over Delay Tolerant Networks.....	202
<i>Zoebir Bong, Peng Boon Sng, and Chai Kiat Yeo</i>	
Missing Value Imputation Method Based on Clustering and Nearest Neighbours.....	206
<i>Satish Gajawada and Durga Toshniwal</i>	

Integrated Load-Based Power Saving for BS and MSS in the IEEE 802.16e Network

Chun-Chuan Yang, Yi-Ting Mai, Jeng-Yueng Chen, and Yu-Chen Kuo

Abstract—In our previous work, the limitation of standard Type I and II power saving in IEEE 802.16e was discussed and the idea of Load-Based Power Saving (LBPS) was proposed. LBPS measures traffic load and adaptively generates proper sleep schedule for the current load. Three LBPS schemes has been proposed for MSS (Mobile Subscriber Station) power saving. In this paper, BS power saving is taken into consideration, and our previously proposed LBPS schemes are revised in order to integrate both BS (Base Station) and MSS in sleep scheduling. Two strategies of integrated power saving, MSS-first and BS-first, are proposed in the paper. Simulation study shows that the proposed schemes can effectively achieve high power saving efficiency for both BS and MSS.

Index Terms—Power saving, IEEE 802.16e, LBPS.

I. INTRODUCTION

There are three standard *power saving classes (PSC)*, Type I, II, and III, in the specification of IEEE 802.16e [1], [2]. In a nutshell, Type I, with its exponentially increased sleep window, is suitable for traffic of *non-real-time variable rate (NRT-VR)* service and *best effort (BE)* service. Using an isochronous pattern of sleep and listening windows, Type II is recommended to support traffic of *real-time variable rate (RT-VR)* service and *unsolicited grant service (UGS)*. Many researchers in power saving have been focusing on modeling or performance improvement based on Type I or II [3]-[9].

In our previous work, we have found that neither Type I/II nor their extension works can achieve good performance for dynamics of traffic load. The main reason is that most of existing mechanisms in a sense adopt a passive way of control in which the sleep schedule is shaped passively by the result of the previous sleep cycle without any information about traffic load or characteristics. In order to accurately determine the proper sleep schedule, the idea of *Load-Based Power Saving (LBPS)* in the category of Type III has been proposed in our previous work [10]-[12]. LBPS models and measures traffic proactively, and the sleep schedule is then determined by traffic load obtained. Three LBPS schemes for *Mobile Subscriber Station (MSS)* sleep scheduling were proposed: *LBPS-Aggr* [10], *LBPS-Split* [11], and *LBPS-Merge* [12]. A power saving scheme integrating real-time traffic and non-real-time traffic was also proposed [13]. In this paper, power saving at the *Base Station (BS)* is

considered, and previously proposed LBPS schemes are revised for accommodating both MSS and BS sleep schedule for more power saving in the IEEE 802.16e network. Results of performance evaluation demonstrate the benefit of integrating BS power saving in LBPS.

The rest of the paper is organized as follows. Our previous work about LBPS is briefly explained in section 2 for better understanding the proposed work in this paper. Schemes of BS-integrated LBPS are presented in section 3. Performance evaluation is presented in section 4. Section 5 concludes this paper.

II. PREVIOUS WORK

A. Basic idea of LBPS and LBPS-Aggr

The objective of LBPS is to adaptively adjust sleep window size of each MSS to better fit in current traffic load by traffic measurement. BS in LBPS needs to estimate the current load for each MSS (denoted by packets per time frame) by collecting and exponentially averaging the samples of load measure as in *TCP Round-Trip Time (RTT)* estimation. For presentation purpose, only downlink traffic is considered in this paper, although uplink traffic can also be integrated into LBPS schemes via some information exchange mechanism between BS and MSS. LBPS sets a target threshold of data accumulation in the buffer for an MSS and dynamically calculates its next sleep window size. In this way, LBPS can adapt to different traffic loads and still achieves a proper level of powering saving. The basic version of LBPS, *LBPS-Aggr*, in which all the traffic in the network is treated as an aggregate flow in calculating the size of the sleep window. In *LBPS-Aggr*, the traffic arrival process is assumed to be Poisson, and data accumulation under load in a time frame is calculated by the following equation:

$$\text{Prob} [i \text{ packet arrivals in a time frame}] = \frac{e^{-\lambda T} (\lambda T)^i}{i!}, \text{ where } T \text{ is the length of a time frame.}$$

The threshold of data accumulation is denoted by *Data_TH* (packets), which is practically set as the capacity of a time frame. The probability of data accumulation exceeding *Data_TH* packets over *K* time frames in a row can be calculated as follows:

$$\begin{aligned} P_{Acc}(K, \text{Data_TH}) &\equiv \text{Prob} [\# \text{ of packet arrivals in } K \text{ time frames} > \text{Data_TH}] \\ &= \sum_{i=\text{Data_TH}+1}^{\infty} \frac{e^{-\lambda KT} (\lambda KT)^i}{i!} \\ &= 1 - \sum_{i=0}^{\text{Data_TH}} \frac{e^{-\lambda KT} (\lambda KT)^i}{i!} \end{aligned}$$

Manuscript received April 10, 2012; revised May 15, 2012.

C. C. Yang and Y. C. Kuo is with the Dept. of Computer Science and Information Engineering, National Chi Nan University, Taiwan, R.O.C (e-mail: wkb@mail.hust.edu.tw)

Y. T. Mai and J. Y. Chen is with the Dept. of Information and Networking Technology, Hsiuping Univ. of Science and Technology, Taiwan, R.O.C

The number of time frames (including the current awake time frame) before the next awake time frame for an MSS is calculated as the smallest value of K such that $P_{Acc}(K, Data_TH)$ is higher than a predefined probability threshold denoted by $Prob_TH$. That is,

The length of one awake-and-sleep cycle \equiv $Length_{AwkSlpCyl}(\lambda, Data_TH) \equiv K^*$

$= \text{Min}\{K \mid P_{Acc}(K, Data_TH) \geq Prob_TH\}$, where an awake-and-sleep cycle is composed of the current awake time frame and the following sleep window.

The size of the sleep window in a cycle is therefore K^*-1 , which is sent by the BS to the currently awake MSSs to prepare for entering the sleep mode.

B. LBPS-Split and LBPS-Merge

LBPS-Split was proposed to improve the performance of LBPS-Aggr in power saving as explained briefly by the following example. Considering the case that $K^* = 2$ (the length of the awake-and-sleep cycle is 2 time frames) in LBPS-Aggr, conceptually it implies all MSSs as a whole should be assigned with one awake time frame out of the cycle of two time frames. But in the schedule we could also split the MSSs into two groups and assign a different awake time frame for each group. Given that the load of a split group is always lighter than the load of the original and bigger group, it's very likely that the new K^* value for each of the split groups (with the same value of $Data_TH$) is larger than the original value of 2. The case of the minimal value of the two new K^* values larger than 2 implies the feasibility of further splitting, which leads to the protocol of LBPS-Split.

The best case of LBPS-Split in power saving is that each of the split groups is composed of a single MSS, and the final value of K^* is therefore determined by the MSS with least load. In such case, with the same length (the final K^*) of the awake-and-sleep cycle, each MSS is assigned with one whole awake time frame in a cycle. The idea leads to another perspective of grouping MSSs in sleep scheduling. Instead of treating all MSSs as one group from the start, we could firstly make each MSS a single-member group for K^* calculation. Since the load of each MSS varies, each group usually has a different value of K^* . In order to achieve a better gain of power saving, the sleep scheduling algorithm should be able to accommodate different values of K^* as long as a feasible sleep schedule can be found. In the case that a feasible sleep schedule cannot be found for the current state of grouping, merging of some groups is necessary. The idea of treating each MSS as a single-member group from the start and merging groups when necessary leads to another enhanced protocol namely LBPS-Merge.

Since it's difficult to check the schedulability of groups with any possible value of K^* , the value of K^* is converted to the closest and smaller power of 2, denoted by $K^\#$ (i.e. $K^\# = 2^{\lfloor \log_2 K^* \rfloor}$) in LBPS-Merge. With the property of powers of 2, a quick check for schedulability can be obtained. Schedulability of a number of groups with different $K^\#$ values is defined by the following equation.

$$Schedulability = \sum_i \frac{1}{K_i^\#}$$

$Schedulability$ equal to or smaller than 1 ($Schedulability \leq$

1) indicates that a feasible schedule can be found. $Schedulability > 1$ indicates the necessity of merging some groups. Group merging should not reduce as much power saving efficiency as possible, which means the value of $K^\#$ after group merging should be kept as larger as possible. Therefore, the merging process in LBPS-Merge is divided into two phases: (1) *non-degraded merge* and (2) *degraded merge*. Merging of two groups that does not result in a smaller value of $K^\#$ is called a non-degraded merge. A degraded merge is accepted only when a non-degraded merge cannot be found. Simulation study has shown that LBPS-Split and LBPS-Merge outperform LBPS-Aggr and Type I (even Type II) based mechanisms in power saving.

III. INTEGRATED POWER SAVING FOR BS AND MSS

There are two different strategies for integration of BS power saving in LBPS. The first strategy namely *S1* is to allow BS entering the sleep mode when all MSSs are in the sleep mode. *S1* does not require any modification of the LBPS schemes, but the power saving efficiency at BS is limited by the load and sleep schedule of MSS. The other strategy considers about the fact that the benefit of power saving at BS is usually larger than power saving at each MSS. Thus a threshold value for power saving (denoted by PSE_TH) at BS is set beforehand in the second strategy *S2*, in which the sleep scheduling algorithm in LBPS schemes must be revised to integrate BS and meet the requirement of PSE_TH . In summary, *S1* is MSS-first power saving and *S2* is BS-first power saving. It's worth mentioning that due to the passive characteristic in power saving, standard PSC Type I or Type II cannot be extended to support BS power saving.

A. Strategy 1 (S1)

Sleep schedule for each MSS is first determined in *S1*. The time frames in which all MSSs in the sleep mode is scheduled as the sleep time frames for BS. LBPS-Aggr presents the simplest case among LBPS schemes for BS power saving since all MSSs are treated as a single group. Starting from the same method as LBPS-Aggr, LBPS-Split iteratively splits all MSSs according to the new K^* value. There are two possible cases to end LBPS-Split algorithm. For the case of the final value of K^* larger than the number of MSSs, there is some room for BS power saving. On the other hand, for the case of the final value of K^* no larger than the number of MSSs, there is no room for BS power saving. For LBPS-Merge, BS power saving depends on the final value of $Schedulability$ in the end of the algorithm. For the case of $Schedulability < 1$, there is room for BS power saving. For the case of $Schedulability = 1$, there is no room for BS power saving.

B. Strategy 2 (S2)

In *S2*, a target of BS power saving (i.e. PSE_TH) is set and the sleep scheduling algorithm in LBPS schemes should try to meet the goal. Since the sleep time frames are the same for BS and all MSSs in LBPS-Aggr, there is no difference between *S1* and *S2* for LBPS-Aggr. The splitting process of LBPS-Split requires some revision in order to meet BS's PSE_TH . Since further splitting makes the

awake-and-sleep cycle longer (i.e. a larger value of K^*), the basic idea of the revision is to stop the splitting process when the length of the *awake-and-sleep cycle* cannot meet BS's PSE_TH for the first time. Given $K_{BS} = \lfloor PSE_TH^{-1} \rfloor$ and one sleep time frame for BS in a cycle, BS's PSE_TH is not met if (1) final K^* (denoted by K_{final}) $> K_{BS}$, or (2) $K_{final} \leq K_{BS}$, but $K_{final} - 1$ time frames which are for MSS sleep scheduling are not enough to accommodate all groups. An example for the case of meeting BS's PSE_TH in LBPS-Split under S2 is given in Fig. 1.

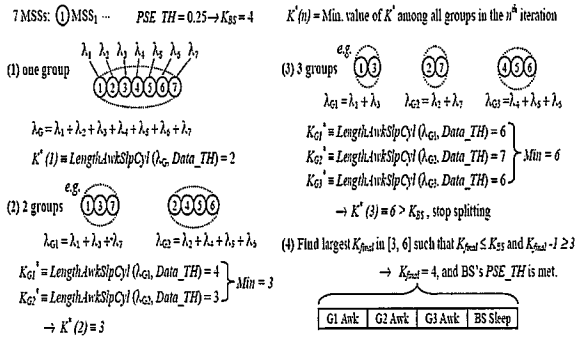


Fig. 1. An example of LBPS-split under S2.

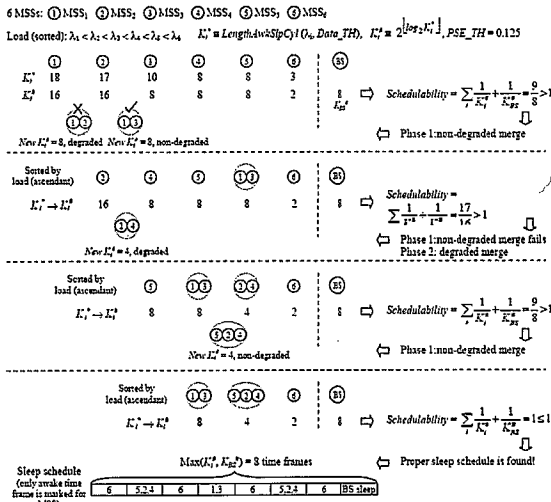


Fig. 2. An example of LBPS-merge under S2.

In LBPS-Merge, each MSS can have its own length (K^*) of the *awake-and-sleep cycle* if possible. The idea of different K^* value for different MSS can be further extended to support BS power saving. Given $K_{BS}^* = 2^{\lfloor \log_2 K_{BS} \rfloor}$ and $K_{BS} = \lfloor PSE_TH^{-1} \rfloor$, it implies one out of K_{BS}^* time frames should be assigned as BS's sleep time frame in order to meet PSE_TH . Therefore, the revised algorithm of LBPS-Merge under S2 treats BS as a special MSS with its own K_{BS}^* value in sleep scheduling. Following changes are made for LBPS-Merge under S2:

- 1) For MSS groups, the value of K means one *awake* time frame out of K^* time frames. Oppositely, the value of K_{BS}^* means one *sleep* time frame out of K_{BS}^* time frames for BS.
- 2) Since no MSS should be in the awake mode when BS is in the sleep mode, BS cannot be merged with MSS.

The equation of *Schedulability* is revised to include BS's

power saving as follows:

$$\text{Schedulability} = \sum_i \frac{1}{K_i^*} + \frac{1}{K_{BS}^*}$$

An example of LBPS-Merge under S2 is given in Fig. 2.

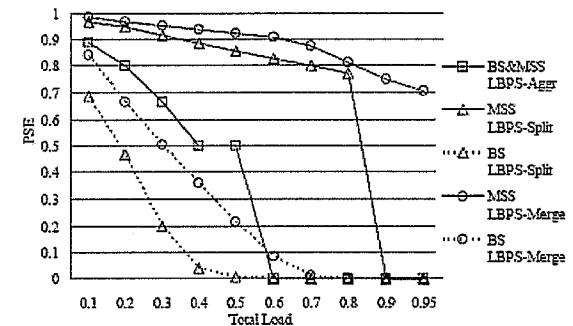


Fig. 3. Power saving efficiency under S1.

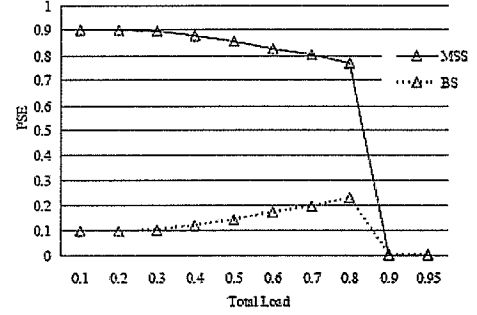


Fig. 4. PSE of LBPS-Split with $PSE_TH = 0.1$

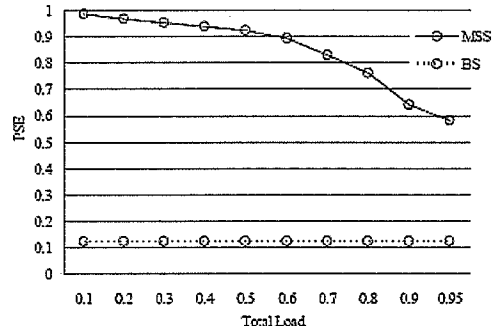


Fig. 5. PSE of LBPS-merge with $PSE_TH = 0.125$

IV. PERFORMANCE EVALUATION

Extensive simulation study has been conducted for performance evaluation of proposed schemes. Due to the limit of paper length, only a few of figures are presented in the paper. Power Saving Efficiency (PSE) for LBPS schemes under S1 is displayed in Fig. 3, which shows (1) if only BS's PSE is considered, LBPS-Aggr is better than the others, and (2) LBPS-Merge outperforms the others if both BS's PSE and MSS's PSE are taken into consideration.

Fig. 4 displays PSE of LBPS-Split with $PSE_TH = 0.1$ (S2). Fig. 5 displays PSE of LBPS-Merge with $PSE_TH = 0.125$ (S2). Fig. 4 and Fig. 5 demonstrate that both revised LBPS-Split and LBPS-Merge can effectively support BS power saving while maintaining high power saving efficiency for MSS. LBPS-Merge outperforms LBPS-Split in both BS and MSS power saving under very heavy load (above 0.9), due to the flexibility of LBPS-Merge allowing different cycle length in sleep scheduling.

V. CONCLUSION

Most of the research works in power saving of wireless networks focused on the user side. In this paper, power saving at BS is considered along with MSS power saving. In our previous work, the idea of Load-Based Power Saving (LBPS) and three related schemes were proposed for MSS-only power saving in IEEE 802.16e. The previously proposed LBPS schemes are revised in order to integrate both BS and MSS in sleep scheduling. Two strategies of integration of BS and MSS power saving, MSS-first and BS-first, are proposed in the paper. Simulation study shows the benefit of the proposed schemes in power saving for both BS and MSS. Future work of the research is to extend the idea of LBPS in the environment of IEEE 802.16j Multi-hop Relay Network. It's expected that high power saving efficiency would inevitably result in high access delay. Therefore, finding a good balance between power saving efficiency and access delay will be a key issue for power saving in multi-hop wireless networks.

ACKNOWLEDGEMENTS

This work was supported in part by the National Science Council, Taiwan, R.O.C., under grant no. NSC 100-2221-E-260-027.

REFERENCES

- [1] IEEE Std. 802.16e-2006, "IEEE Standard for Local and Metropolitan Area Networks—Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems -Amendment for Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands," Feb. 2006.
- [2] IEEE Std. 802.16-2009, "IEEE Standard for Local and metropolitan area networks Part 16: Air Interface for Broadband Wireless Access Systems," May 2009.
- [3] S.T. Sheu, Y.C. Cheng, and L.W. Chen, "Listening Interval Spreading Approach (LISA) for Handling Burst Traffic in IEEE 802.16e Wireless Metropolitan Area Networks," in *Proc. IEEE 68th Vehicular Technology Conference (VTC 2008-Fall)*, Oct. pp. 1-5, 2008.
- [4] Y. Wu, Y. Le, and D. Zhang, "An Enhancement of Sleep Mode Operation in IEEE 802.16e Systems," in *Proc. IEEE 69th Vehicular Technology Conference (VTC 2009-Spring)*, pp. 1-6, 2009.
- [5] J. J. Chen, J. M. Liang, and Y.C. Tseng, "An Energy Efficient Sleep Scheduling Considering QoS Diversity for IEEE 802.16e Wireless Networks," in *Proc. 2010 IEEE International Conference on Communications (ICC)*, pp. 1-5, 2010.
- [6] T. C. Chen and J. C. Chen, "Maximizing Unavailability Interval for Energy Saving in IEEE 802.16e Wireless MANs," *IEEE Transactions on Mobile Computing*, vol. 8, no. 4, pp. 475-487, 2009.
- [7] E. Hwang, K. J. Kim, J. J. Son, and B. D. Choi, "The Power-Saving Mechanism With Periodic Traffic Indications in the IEEE 802.16e/m," *IEEE Transactions on Vehicular Technology*, vol. 59, no. 1, Jan, pp. 319-334, 2010.
- [8] C. Cicconetti, L. Lenzi, E. Mingozzi, and C. Vallati, "Reducing Power Consumption with QoS Constraints in IEEE 802.16e Wireless Networks," *IEEE Transactions on Mobile Computing*, vol. 9, no. 7, pp. 1008 – 1021, 2010.
- [9] C.H. Hsu, K.T. Feng, and C.J. Chang, "Statistical Control Approach for Sleep Mode Operations in IEEE 802.16m Systems," *IEEE Transactions on Vehicular Technology*, vol. 59, no. 9, Nov, pp. 4453-4466, 2010.
- [10] C. C. Yang, C. H. Fang, and J. R. Lin, "Adaptive Power Saving Strategy Based on Traffic Load in the IEEE 802.16e Network," in *Proc. International Conference on Information and Communication Technologies (ICICT 2010)*, pp. 26-28, Tokyo, Japan, 2010.
- [11] C. C. Yang, Y. T. Mai, J. Y. Chen, and Y. S. Shen, "A Clustering Technique of Load-based Power Saving in the IEEE 802.16e Network," in *Proc. the Annual International Conference on Mobile Communications, Networking and Applications (MobiCONA 2011)*, Singapore, pp. M5-M9, 2010.
- [12] C. C. Yang, Y. T. Mai, J. Y. Chen, Y. S. Shen, and Y. C. Kuo, "LBPS: Load-based Power Saving in the IEEE 802.16e Network," to appear in *Computers and Electrical Engineering*.
- [13] Y.T. Mai, C.C. Yang, J.Y. Chen, and M.H. Lin, "An Integrated Load-based Power Saving Scheme in IEEE 802.16e," in *Proc. the 2012 FTFA International Conference on Advanced IT, engineering and Management (FTFA AIM 2012)*, Seoul, Korea, Feb. 6-8, pp. 71-72, 2012.